





# PRODUCT SELECTION GUIDE

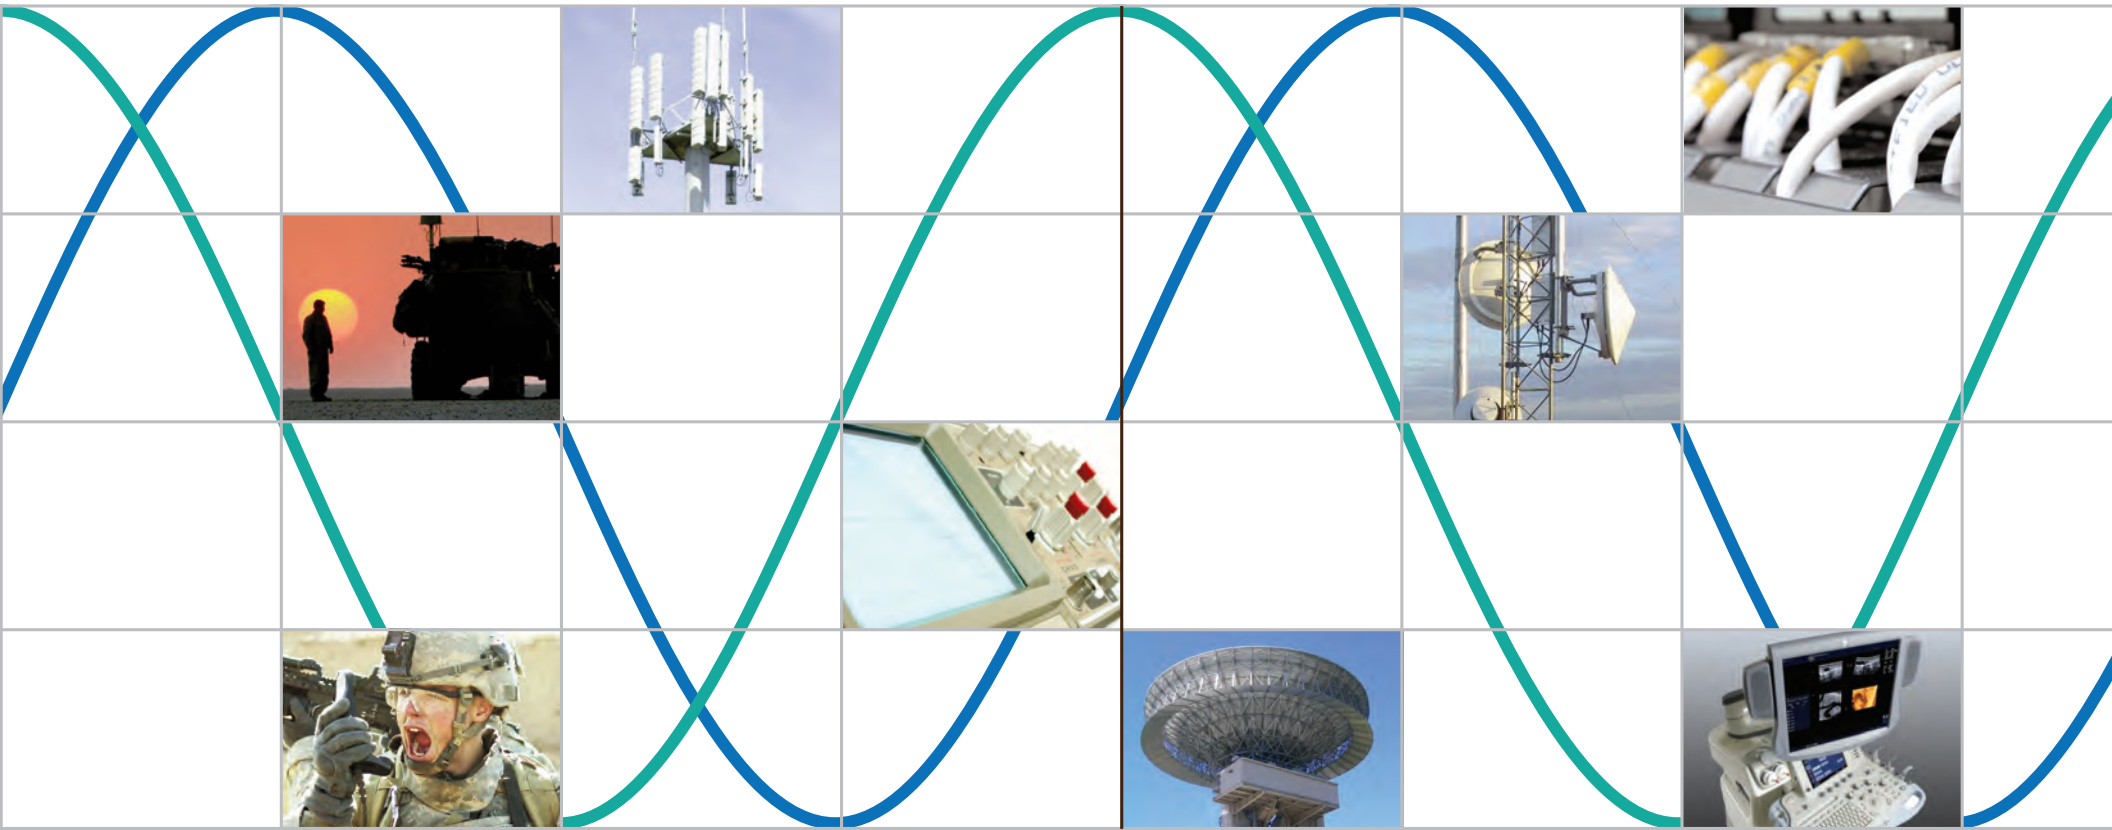

A pioneer in the design and manufacturing of precision crystal oscillators for 80 years. Today, Valpey Fisher Corporation (NASDAQ:VPF) is expanding into higher frequency, lower phase noise timing solutions, high performance RF/Microwave components, integrated modules and ultrasonic transducers.

Valpey Fisher's broad product offering addresses a wide range of end markets including wireless and wireline infrastructure, microwave radio, military communications, instrumentation, imaging and industrial applications.

Valpey Fisher is an ISO9001 approved organization with its corporate headquarters located in a research, engineering, and manufacturing facility in Hopkinton, MA.

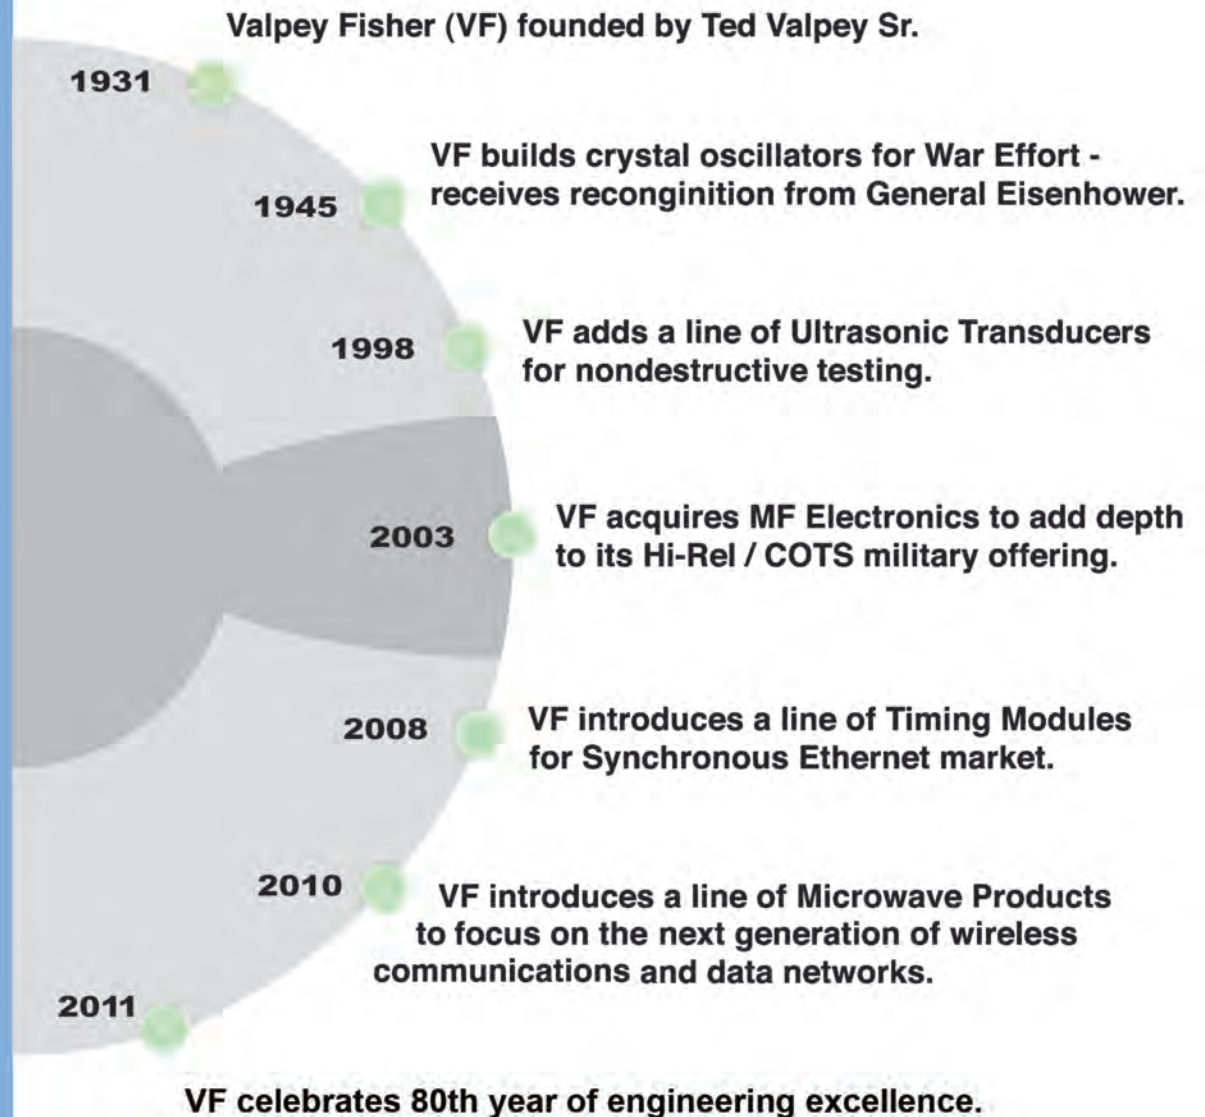



# Valpey Fisher Corporation

## Product Lines



RF/MICROWAVE	FREQUENCY CONTROL	ULTRASOUND
<p>High performance RF/Microwave components and integrated modules for point-to-point, wireless infrastructure, and military communications.</p> <p><u>INTEGRATED MODULE</u> Voltage Variable Attenuator</p> <p><u>MONOLITHIC PASSIVE DEVICES</u> 90 Degree Hybrid Coupler Power Divider Fixed Attenuator</p>	<p>Timing and synchronization solutions for optical networking, wireless infrastructure, avionics, test and measurement.</p> <p><u>TIMING MODULES</u> Jitter Attenuator Frequency Translator Clock Generator</p> <p><u>PRECISION OSCILLATORS</u> OCXO TCXO VCXO XO</p> <p><u>EXTREME CONDITIONS</u> High Temperature High Reliability COTS Shock &amp; Vibration Resistant</p>	<p>Ultrasonic transducers used in nondestructive testing, flaw detection, thickness gauging, acoustic microscopy, and particle sizing.</p> <p><u>TRANSDUCERS</u> Contact Delay Line Angle Beam Immersion High Frequency Dual Element Shear Wave Pinducer</p>





	PART NUMBER	FREQUENCY RANGE								CONTROL VOLTAGE	ATTENUATION RANGE	IIP3
		500MHz	1.0GHz	1.5GHz	2.0GHz	2.5GHz	3.0GHz	3.5GHz	4.0GHz			
LTE	VFVA500-200	600 - 900MHz								5.0V	25 dB	45 dBm
GSM / WCDMA	VFVA501-200	0.7 - 1.1GHz								5.0V	25 dB	45 dBm
PCS, DCS, UMTS, AWS	VFVA502-200	1.5 - 2.2GHz								5.0V	25 dB	45 dBm
	VFVA503-200	1.8 - 2.4GHz								5.0V	25 dB	45 dBm
LTE / WiMax	VFVA504-200	2 - 3GHz								5.0V	25 dB	45 dBm
	VFVA505-200	3 - 4GHz								5.0V	25 dB	45 dBm



### PRODUCT SELECTION GUIDE



	PART NUMBER	FREQUENCY RANGE							INSERTION LOSS	ISOLATION	VSWR
		500MHz	1.0GHz	1.5GHz	2.0GHz	2.5GHz	3.0GHz	3.5GHz			
LTE	VFHY100-010	650 - 850MHz							0.35 dB	30 dB	1.1 : 1
GSM / WCDMA	VFHY101-010	750 - 950MHz							0.35 dB	30 dB	1.1 : 1
	VFHY102-010	0.8 - 1GHz							0.35 dB	30 dB	1.1 : 1
PCS, DCS, UMTS, AWS	VFHY103-010	1.6 - 2GHz							0.35 dB	30 dB	1.1 : 1
	VFHY104-010	1.7 - 2.2GHz							0.35 dB	30 dB	1.1 : 1
	VFHY105-010	1.9 - 2.4GHz							0.35 dB	30 dB	1.1 : 1
LTE / WiMax	VFHY106-010	2.2 - 2.9GHz							0.35 dB	30 dB	1.1 : 1
	VFHY107-010	3 - 4GHz							0.35 dB	30 dB	1.1 : 1



### PRODUCT SELECTION GUIDE



	PART NUMBER	FREQUENCY RANGE								INSERTION LOSS	ISOLATION	VSWR INPUT/OUTPUT
		500MHz	1.0GHz	1.5GHz	2.0GHz	2.5GHz	3.0GHz	3.5GHz	4.0GHz			
LTE	VFPD200-010	698 - 798MHz								0.35 dB	22 dB	1.15 / 1.10
GPS/GSM/WCMA	VFPD201-010	820 - 960MHz								0.35 dB	20 dB	1.20 / 1.15
PCS, DCS, UMTS, AWS	VFPD202-010	1.4 - 1.7GHz								0.35 dB	18 dB	1.20 / 1.15
	VFPD203-010	1.7 - 2GHz								0.4 dB	18 dB	1.20 / 1.15
LTE / WiMax	VFPD204-010	2 - 2.3GHz								0.4 dB	18 dB	1.20 / 1.15
	VFPD205-010	2.4 - 2.7GHz								0.5 dB	17 dB	1.40 / 1.25
	VFPD206-010	3.3 - 3.8GHz								0.5 dB	17 dB	1.50 / 1.30





PART NUMBER	FREQUENCY	ATTENUATION VALUE (dB) ±5%	FLATNESS	VSWR
VFAT003-010	DC - 8GHz	3 dB	0.2 dB	1.15 : 1
VFAT006-010	DC - 8GHz	6 dB	0.2 dB	1.2 : 1
VFAT010-010	DC - 8GHz	10 dB	0.3 dB	1.2 : 1
VFAT020-010	DC - 8GHz	20 dB	0.4 dB	1.2 : 1










# Timing Modules

## JITTER ATTENUATORS

### PRODUCT SELECTION GUIDE




	PRODUCT SERIES	OUTPUT	SUPPLY VOLTAGE	FREQUENCY RANGE										JITTER RMS 12KHz to 20MHz
				1KHz	10MHz	20MHz	50MHz	100MHz	200MHz	300MHz	400MHz	600MHz	800MHz	
PECL / LVPECL	 VFJA100	PECL 25.4 x 22.0	5.0V 3.3V	8KHz - 100MHz 1 Input Frequency 1 Output Frequency 100MHz - 1GHz										<0.2ps
	 VFJA400	LVPECL 19.5 x 15.5	3.3V	8KHz - 200MHz 4 Selectable Inputs 10MHz - 200MHz 1 Output Frequency										<0.2ps
	VFJA401	LVPECL 19.5 x 15.5	3.3V	4 Selectable Inputs 200MHz - 800MHz 10MHz - 200MHz 1 Output Frequency										<0.2ps
SINE	 VFJA120	SINE 25.4 x 22.0	5.0V 3.3V	8KHz - 100MHz 1 Input Frequency 10MHz - 200MHz 1 Output Frequency										<0.15ps
CMOS	 VFJA130	CMOS 25.4 x 22.0	5.0V 3.3V	8KHz - 100MHz 1 Input Frequency 10MHz - 200MHz 1 Output Frequency										<0.18ps
	 VFJA432	CMOS 19.5 x 15.5	3.3V	8KHz - 200MHz 4 Selectable Inputs 10MHz - 200MHz Dual Outputs										<0.18ps
	VFJA434	CMOS 19.5 x 15.5	3.3V	8KHz - 200MHz 4 Selectable Inputs 10MHz - 200MHz Quad Outputs										<0.18ps
SYNC-E	 VFJA402	LVPECL 19.5 x 15.5	3.3V	8KHz - 200MHz 3 Inputs Frequencies with Free Run Mode 10MHz - 200MHz 1 Output Frequency										<0.2ps
	 VFJA905	LVC MOS 19.5 x 15.5	3.3V	2.5MHz 25MHz 125MHz 3 Inputs Frequencies with Free Run Mode 25MHz Dual Outputs										<0.25ps
	VFJA910	LVC MOS 15.0 x 13.0	3.3V	25MHz 1 Input Frequency with Free Run Mode 25MHz Dual Outputs										<0.25ps

Featured product offering shown. Please visit [www.valpeyfisher.com](http://www.valpeyfisher.com) for our full line of Jitter Attenuators.




#### Jitter Attenuator

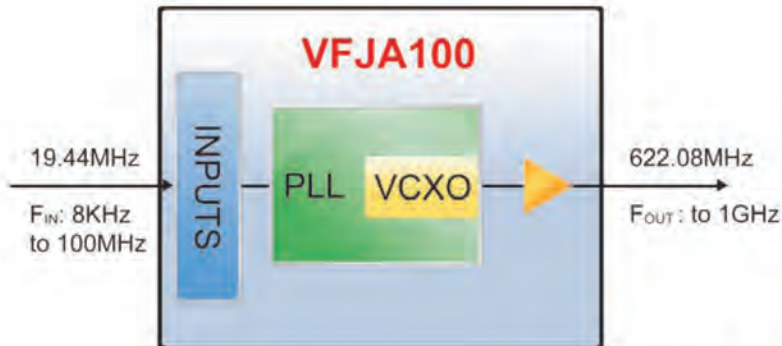

- Lowest jitter available (<0.2ps)
- Output synchronized to input
- VCXO (crystal) output
- Lock detect available
- Customer defined loop bandwidth

- Up to 4 user selectable inputs
- Inputs can be independent frequencies
- Up to 4 outputs (CMOS and Sine)
- Up to two outputs LVPECL or LVDS



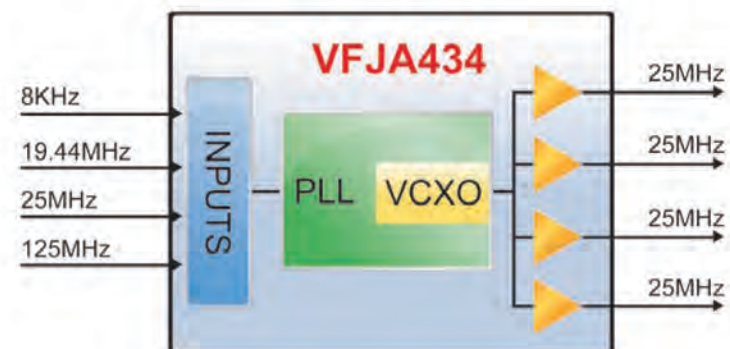


#### Quad Output Jitter Attenuator




### PRODUCT SELECTION GUIDE

RoHS  
6/6

#### FREQUENCY TRANSLATORS

	PRODUCT SERIES	OUTPUT	SUPPLY VOLTAGE	FREQUENCY RANGE ( MHz )											JITTER RMS 12KHz to 20MHz
				1KHz	10MHz	20MHz	50MHz	100MHz	200MHz	300MHz	400MHz	600MHz	800MHz	1.0GHz	
PECL / LVPECL	 VFFT100	PECL 25.4 X 22.0	5.0V 3.3V	8KHz – 250MHz				1 Input Frequency				50MHz – 1GHz			<0.3ps
	 VFFT110	LVPECL 19.5 x 17.0	3.3V	10KHz – 800MHz				1 Input Frequency				4 Selectable Outputs 300MHz – 1.5GHz			<1.0ps
	VFFT200	LVPECL 19.5 x 20.5	3.3V	8KHz – 200MHz				1 Input Frequency				50MHz – 200MHz 1 Output Frequency w/10ppm Holdover			<1.0ps
	 VFFT400	LVPECL 19.5 x 17.0	3.3V	8KHz – 200MHz				4 Input Frequencies				50MHz – 400MHz 4 Output Frequencies 50MHz Range			<2.0ps
	VFFT401	LVPECL 19.5 x 17.0	3.3V	100MHz – 800MHz				4 Input Frequencies				4 Output Frequencies 100MHz Range 400MHz – 1.5GHz			<1.0ps
SINE	 VFFT120	SINE 25.4 x 22.0	5.0V 3.3V	8KHz – 180MHz				1 Input Frequency				10MHz – 200MHz 1 Output Frequency			<0.15ps
CMOS	 VFFT130	CMOS 25.4 x 22.0	5.0V 3.3V	8KHz – 180MHz				1 Input Frequency				10MHz – 200MHz 1 Output Frequency			<0.15ps


#### CLOCK GENERATORS

	PRODUCT SERIES	OUTPUT	SUPPLY VOLTAGE	FREQUENCY RANGE ( MHz )											JITTER RMS 12KHz to 20MHz
				1KHz	10MHz	20MHz	50MHz	100MHz	200MHz	300MHz	400MHz	600MHz	800MHz	1.0GHz	
	VFCG100	LVPECL 19.5 x 17.0	3.3V	4 Selectable Output Frequencies				300MHz – 1.5GHz							<1.0ps
	VFCG-HD1	HCMOS 22 x 22	3.3V	15KHz – 67.5KHz 30 Selectable Inputs				27MHz – 148.35MHz				Outputs 27MHz and either 74.25MHz or 74.175MHz			<2.0ps


Featured product offering shown. Please visit [www.valpeyfisher.com](http://www.valpeyfisher.com) for our full line of Timing Modules.




#### Synchronous Clock Generator for Standard & High Definition Video Broadcast

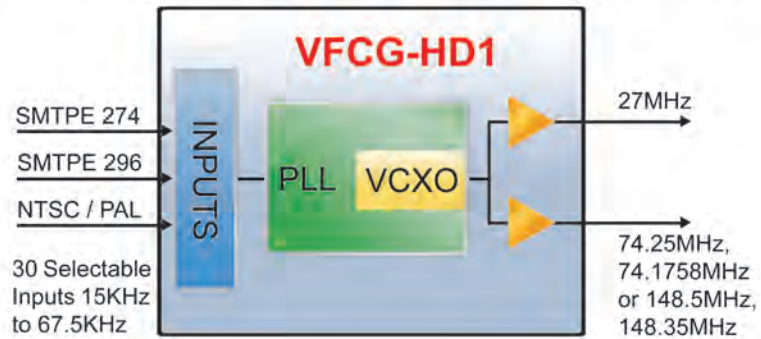


#### SONET Frequency Translator with 10ppm Automatic Holdover

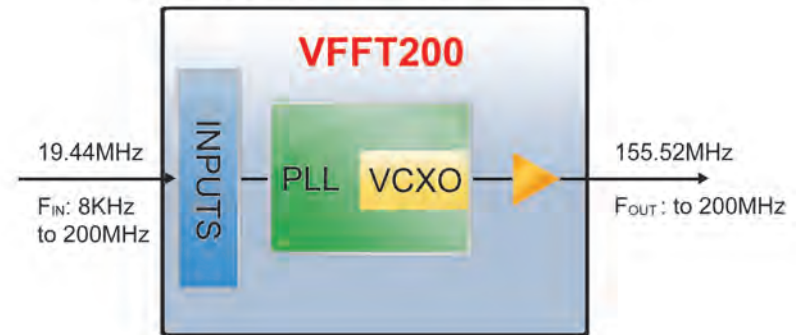

#### Quad Selectable Output Frequency Translator to 1.5GHz

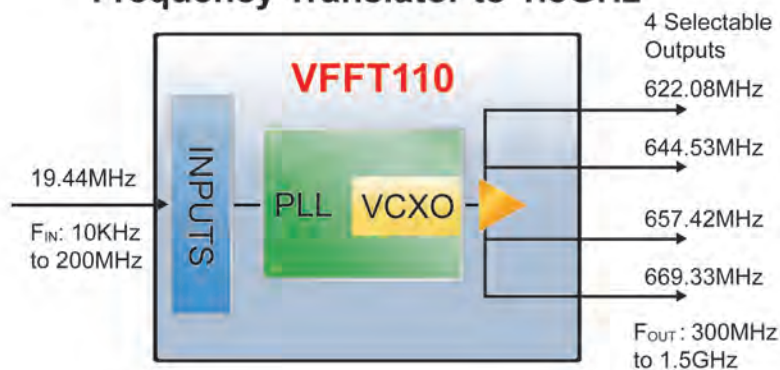



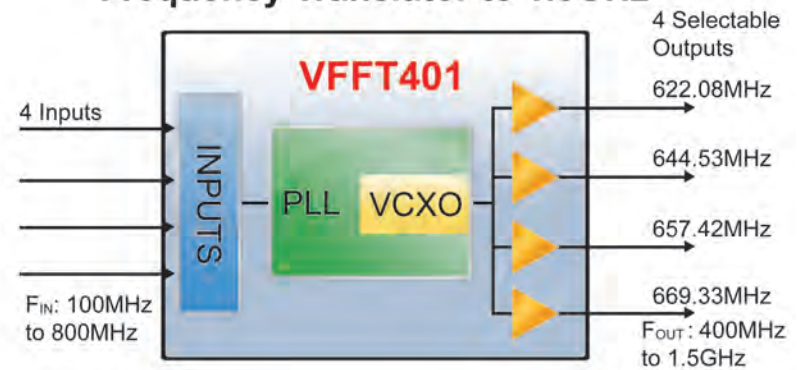


#### Quad Selectable Output Frequency Translator to 1.5GHz



### PRODUCT SELECTION GUIDE



	PRODUCT SERIES	OUTPUT	SUPPLY VOLTAGE	FREQUENCY RANGE ( MHz )					POWER (25°C)	MAXIMUM STABILITY**	MAXIMUM OPERATING TEMPERATURE**	PHASE NOISE FLOOR (dBc/Hz)
				10MHz	20	50	100	200MHz				
<b>Ultra Stable OCXOs</b>	 25.4mm x 22.0mm	VFOV100	3.3V 5.0V 12.0V	5MHz - 120MHz					1.0W	±10ppb	-40°C to +85°C	-168
		VFOV110	5.0V 12.0V	25MHz - 135MHz					1.2W	±200ppb	-40°C to +85°C	-174
	 36.1mm x 27.2mm Europack	VFOV200	3.3V 5.0V 12.0V	5MHz - 250MHz					1.0W	±2ppb	-40°C to +85°C	-160
		VFOV300	5.0V 12.0V	8MHz - 100MHz					1.25W	±0.5ppb	-30°C to +70°C	-165
<b>Micro-Miniature, Ultra Low Power OCXOs</b>	 15.1mm x 15.1mm	VFOV400	CMOS/SINE 3.3V 5.0V	5MHz - 250MHz					0.12W	±5ppb	-40°C to +85°C	-165
	 20.5mm x 14.0mm	VFOV500	CMOS/TTL 3.3V 5.0V	30MHz - 120MHz					0.12W	±20ppb	-40°C to +85°C	-160
<b>Small Low Power OCXO</b>	 DIL-14	<b>NEW</b> VFOV600	HCMOS/TTL 3.3V 5.0V	10MHz - 100MHz					0.5W	±100ppb	-20°C to +70°C	-170
		<b>NEW</b> VFOV650	HCMOS 3.3V 5.0V	10MHz - 100MHz					0.6W	±10ppb	-40°C to +85°C	-165


Featured product offering shown. Please visit [www.valpeyfisher.com](http://www.valpeyfisher.com) for our full line of OCXOs.

\*\*Not all stabilities available with all temperature ranges.



### PRODUCT SELECTION GUIDE

#### OCXO Phase Noise Comparison at 10MHz

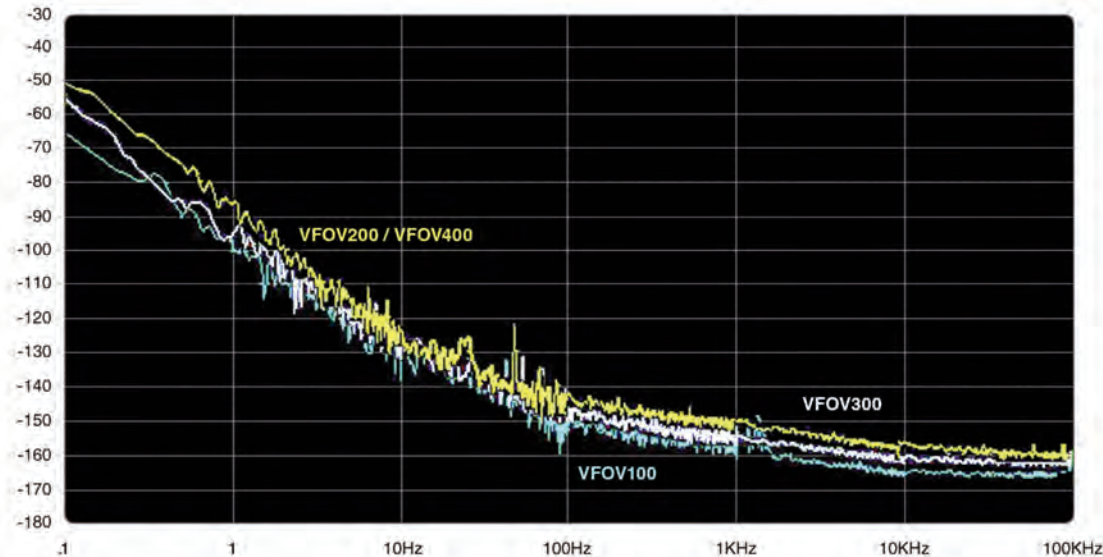


**VFOV100** Ultra low noise performance is provided by using High Q fundamental SC cut crystals. Available up to 120MHz. For 100MHz see below.

**VFOV200** is the industry's standard low noise SC cut OCXO. Available in very high frequencies incorporating an analog multiplier.

**VFOV300** double oven is Stratum II compliant and is a suitable low cost replacement for Rubidium clocks and an excellent choice for GPS hold-over circuits. Ruggedized version available.

**VFOV400** is the world's smallest, fastest warm up OCXO (<30sec.) and lowest power consumption (typ. 120mW). Available in very high frequencies incorporating an analog multiplier. For 100MHz see below.

#### OCXO Phase Noise Comparison at 100MHz

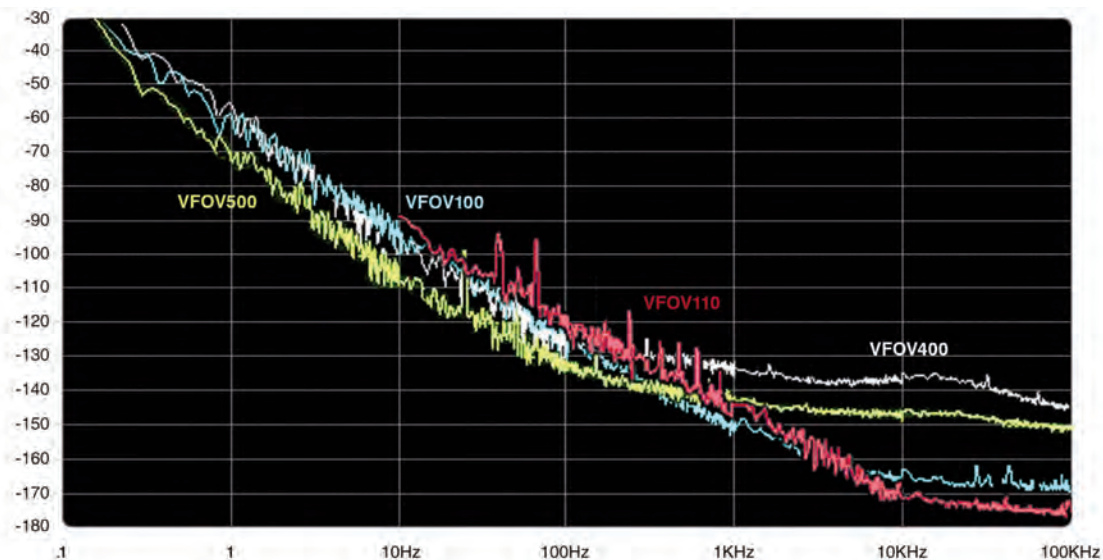







**VFOV110** uses proprietary technology to achieve a superior noise floor at 10KHz matching the worlds best performance in a smaller 0.8"x1" SMD package and is very competitively priced. Applications include Wireless Point to point, ADC reference, RADAR and SATCOM.

**VFOV500** is the world's smallest, fastest warm up OCXO (<30sec.) and lowest power consumption (typ.120mW). Applications include SARSAT and portable test equipment. Very low phase noise fundamental mode crystal.

### PRODUCT SELECTION GUIDE



	PRODUCT SERIES	PACKAGE SIZE (mm)	SUPPLY VOLTAGE	FREQUENCY RANGE ( MHz )							TEMP. STABILITY* (MAX)	OPERATING TEMPERATURE**
				5	20	100	200	400	600	800		
CLIPPED SINE	 VFTX250	2.5 x 2.0	2.8V 2.5V	10MHz - 52MHz							±0.5ppm	-40°C to +85°C
	VFTX300	3.2 x 2.5	3.0V 5.0V	10MHz - 40MHz							±0.5ppm	-40°C to +85°C
	VFTX301	5.0 x 3.2	3.0V 5.0V	10MHz - 40MHz							±0.5ppm	-40°C to +85°C
	VFTX302	5 x 7	3.3V 5.0V	10MHz - 40MHz							±0.5ppm	-40°C to +85°C
CMOS	 VFTX332 STRATUM III	5 x 7	3.3V 5.0V	10MHz - 26MHz							±0.28ppm	-40°C to +85°C
	 VFTX160 STRATUM III	25.4 x 22.0	3.3V	10MHz - 200MHz							±0.28ppm	0°C to +70°C
	VFTX130			30MHz - 180MHz							±0.5ppm	-40°C to +85°C
SINE	 VFTX120	25.4 x 22.0	3.3V	30MHz - 180MHz							±0.5ppm	0°C to +70°C
	VFTX150 STRATUM III			10MHz - 200MHz							±0.28ppm	0°C to +70°C
	 VFTX110	35.4 x 26.7	5.0V	50MHz - 1000MHz							±0.5ppm	-40°C to +85°C
LVPECL	 VFTX140 STRATUM III	25.4 x 22.0	3.3V	200MHz - 1000MHz							±0.28ppm	0°C to +70°C
	VFTX100		3.3V 5.0V	200MHz - 1000MHz							±0.5ppm	-40°C to +85°C







Featured product offering shown. Please visit [www.valpeyfisher.com](http://www.valpeyfisher.com) for our full line of TCXOs.

\*\*,\*\* - Other stability and operating temperature ranges available.



### PRODUCT SELECTION GUIDE









	PRODUCT SERIES	PACKAGE SIZE (mm)	SUPPLY VOLTAGE	FREQUENCY RANGE ( MHz )							JITTER RMS (12KHz ~ 20MHz)	APR (MINIMUM)
				1	50	100	200	300	400	600		
CMOS	 VF194/VF294	5 x 7	3.3V 5.0V	1.5MHz – 160MHz							<0.4ps typical	±50ppm
	R3306			1.8MHz – 80MHz								
	 VF594 JLEAD	9 x 14	3.3V 5.0V	1.5MHz – 160MHz							<0.5ps typical	±50ppm
	 VFVX130			19MHz – 200MHz								
LVPECL / LVDS	 VFVX301	5 x 7	2.5V 3.3V	38MHz – 680MHz							<0.4ps typical	±150ppm
	VFVX321			60MHz – 800MHz								
PECL/LVPECL	 VF596 JLEAD	9 x 14	3.3V 5.0V	19.44MHz – 200MHz							<0.5ps typical	±50ppm
	VFVX100			200MHz – 1000MHz								
	 VFVX110			200MHz – 1000MHz								
	VFVX120			19MHz – 200MHz								

Featured product offering shown. Please visit [www.valpeyfisher.com](http://www.valpeyfisher.com) for our full line of VCXOs.



## PRODUCT SELECTION GUIDE



	PRODUCT SERIES	PACKAGE SIZE (mm)	SUPPLY VOLTAGE	FREQUENCY RANGE ( MHz )							TEMP. STABILITY (TYP)*	OPERATING TEMPERATURE**	JITTER RMS (12KHz-20MHz)
				500KHz	50MHz	100	200	300	400	600			
CMOS	 VFXO203	3.2 x 2.5	1.8V	800KHz – 110MHz							±20ppm	-40°C to +85°C	<20ps
	 VFXO202	5.0 x 3.2	2.5V 3.3V	1MHz – 220MHz							±20ppm	-40°C to +85°C	<1ps
	 VF3	5 x 7	3.3V	1.8MHz – 160MHz							±20ppm	-40°C to +85°C	<0.5ps
	 VF540	9 x 14	3.3V	2MHz – 130MHz							± 20ppm	-55°C to +125°C	<1ps
PECL/LVDS	 VFXO301	5 x 7	3.3V 5.0V	38MHz – 680MHz							±20ppm	-40°C to +85°C	<0.4ps
	VFXO321			60MHz – 800MHz							±20ppm	-40°C to +85°C	<0.1ps
	VFXO401			15MHz – 320MHz							±20ppm	-40°C to +85°C	<0.7ps
PECL/LVDS/SINE	 VFXO100	9 x 14	3.3V	180MHz – 1000MHz							±20ppm	-40°C to +85°C	<0.2ps
	VFXO110			19MHz – 200MHz							±20ppm	-40°C to +85°C	<0.4ps


Featured product offering shown. Please visit [www.valpeyfisher.com](http://www.valpeyfisher.com) for our full line of XOs.

\*,\*\* - Other stability and operating temperature ranges available.



## PRODUCT SELECTION GUIDE



	PRODUCT SERIES	PACKAGE SIZE (mm)	SUPPLY VOLTAGE	FREQUENCY RANGE ( MHz )							STABILITY	OPERATING TEMPERATURE
				500KHz	1MHz	20	50	100	200	400		
LVPECL/LVDS	 VFH3225	3.2 x 2.5	1.8V 2.5V 3.3V	50MHz - 160MHz							±50ppm	-55°C to 125°C
	 VFH240C	5x7	2.5V 3.3V	38MHz - 640MHz							±75ppm	-55°C to 125°C
Hi-Rel	VFH2321	5x7	1.8V	850KHz - 165MHz							±50ppm	-55°C to 125°C
	VFH2121		3.3V 5.0V	500KHz - 125MHz							±50ppm	-55°C to 125°C
	T5321/T5421		3.3V	1MHz - 100MHz							±25ppm	-55°C to 125°C
	T5621/T5721		5.0V	16MHz - 150MHz							±25ppm	-55°C to 125°C
CMOS	M5500	DIP14	5.0V	1Hz - 125MHz							±50ppm	-55°C to 125°C
	M6306 VCXO			1MHz - 35MHz							±50ppm	-55°C to 125°C
	M1254/M3254			20KHz - 150MHz							±75ppm	-55°C to 200°C
COTS	T1250/T3250	5x7	5.0V	20KHz - 100MHz							±75ppm	-55°C to 200°C
	T7250/T9250		3.3V	20KHz - 100MHz							±75ppm	-55°C to 200°C

Featured product offering shown. Please visit [www.valpeyfisher.com](http://www.valpeyfisher.com) for our full line of Hi-Rel/COTS.



### PRODUCT SELECTION GUIDE



	PRODUCT FAMILIES	FREQUENCY RANGE									SIZE (inches)
		1KHz	1MHz	2MHz	5MHz	10MHz	20MHz	50MHz	100MHz	120MHz	
<b>CONTACT</b>	Standard	0.5MHz, 1MHz, 2.25MHz, 3.5MHz, 5MHz									0.5", 0.75", 1.0", 1.125", 1.25"
	Fingertip	1MHz, 2.25MHz, 3.5MHz, 5MHz, 7MHz, 10MHz									0.25", 0.375", 0.5", 0.75", 1.0"
	Protective Face	0.5MHz, 1MHz, 2.25MHz, 3.5MHz, 5MHz									0.5", 0.75", 1.0", 1.125"
<b>DELAY LINE</b>	Removable	2.25MHz, 3.5MHz, 5MHz, 7MHz, 10MHz, 15MHz, 20MHz, 25MHz									0.5", 0.75", 0.125", 0.375"
	Permanent	2.25MHz, 3.5MHz, 5MHz, 7MHz, 10MHz, 15MHz, 20MHz, 25MHz									0.5", 0.75", 0.125", 0.375"
<b>ANGLE BEAM</b>	Standard	0.5MHz, 1MHz, 2.25MHz, 3.5MHz, 5MHz									0.5 x 0.5", 0.5 x 1.0", 1.0 x 1.0"
	AWS	2.25MHz									0.625 x 0.625", 0.625 x 0.75", 0.75 x 0.75"
	Potted Angle	2.25MHz, 5MHz, 10MHz									0.187 x 0.187", 0.25 x 0.25", 0.375 x 0.375", 0.5 x 0.5"
	Threaded	1MHz, 2.25MHz, 3.5MHz, 5MHz, 7MHz, 10MHz									0.25", 0.375", 0.5"
<b>IMMERSION</b>	Standard	0.5MHz, 1MHz, 2.25MHz, 3.5MHz, 5MHz, 7MHz, 10MHz, 15MHz, 20MHz, 25MHz									0.25", 0.375", 0.5"
	Large	0.5MHz, 1MHz, 2.25MHz, 3.5MHz, 5MHz, 7MHz, 10MHz									0.75", 1.0", 1.125", 1.25", 1.5"
	Pencil	1MHz, 2.25MHz, 3.5MHz, 5MHz, 7MHz, 10MHz, 15MHz, 20MHz, 25MHz									0.125", 0.25"
	Paint Brush	2.25MHz, 3.5MHz, 5MHz, 7MHz, 10MHz									1.50" x 0.25" 2.0" x 0.25" 3.0" x 0.25"
<b>HIGH FREQUENCY</b>	Standard	20MHz, 30MHz, 50MHz, 75MHz, 100MHz									0.25"
	Large	50MHz, 75MHz, 90MHz, 100MHz, 125MHz, 150MHz									0.125", 0.25"
	Contact	20MHz, 30MHz, 50MHz, 75MHz, 100MHz, 125MHz, 150MHz									0.125", 0.25"
<b>DUAL ELEMENT</b>	Potted Fingertip	1MHz, 2.25MHz, 3.5MHz, 5MHz, 10MHz									0.25", 0.375", 0.5", 0.75"
	Removable Fingertip	1MHz, 2.25MHz, 3.5MHz, 5MHz, 10MHz									0.25", 0.375", 0.5", 0.75"
	Wide Scan	1MHz, 2.25MHz, 3.5MHz, 5MHz, 10MHz									0.5" x 0.5", 0.5" x 1.0"
<b>SHEAR WAVE</b>	Standard	50KHz, 0.1MHz, 0.25MHz, 0.5MHz, 1MHz, 5MHz									0.5", 1.0"
	Fingertip	1MHz, 2.25MHz, 5MHz									0.125", 0.25", 0.5"
	Delay Line	5MHz, 10MHz, 15MHz, 20MHz, 25MHz									0.25"
<b>PINDUCERS</b>	Standard	10KHz - 10MHz									0.04", 0.053"



# Worldwide Sales

## USA Office



- **Corporate Headquarters**

Valpey Fisher Corporation  
75 South Street  
Hopkinton, MA 01748  
+1-800-982-5737  
+1-508-435-6831  
sales@valpeyfisher.com

## Europe Office



- **Europe Office**

Europe & Middle East Sales Mgr.  
United Kingdom  
+1-800-982-5737  
EMESales@valpeyfisher.com

## China Office



- **China Office**

China Sales Mgr.  
Minhang District Shanghai, China  
+1-800-982-5737  
ChinaSales@valpeyfisher.com

\* Local distributors and sales representatives information are on our website, [www.valpeyfisher.com](http://www.valpeyfisher.com), under Worldwide Sales





**Corporate Headquarters**

**Valpey Fisher Corporation**  
75 South Street  
Hopkinton, MA 01748-2204  
USA

Phone: 800-982-5737  
Phone: 508-435-6831  
Fax: 508-497-6377  
sales@valpeyfisher.com  
www.valpeyfisher.com

